

## APPLICATIONS

- Self-service island soup bar
- Medium temperature (140°-165°)

## STANDARD FEATURES

### CABINET CONSTRUCTION

- Base cabinet to consist of double thick 3/8" bendable plywood finished in high pressure plastic laminate.
- Countertop finished in high pressure plastic laminate.
- Storage area below to house controls, electrical and plumbing components.
- 2 rows of protective 1" vinyl bumpers.
- (Unit must be leveled plumb at time of installation.

### HEATED FOOD MERCHANDISING

- NSF-4 hot food wells warm uniformly keeping product at optimum temperature.
- Drains connected through a manifold to a single drain valve.
- Infinite (dial) control with pilot light.

### CANOPY/SNEEZE GUARD

- Overhead canopy to consist of square stainless steel tubing, 14 gauge formed stainless steel top and tempered glass.
- LED lights have a separate on/off switch

### ELECTRICAL REQUIREMENTS


- Unit is pre-wired and furnished with a junction box for use on a dedicated 120/208V, 60Hz, 1 phase circuit.

### WARRANTY

- One year - Parts and Labor

## OPTIONS/ACCESSORIES

- Countertop available in stainless steel, solid surface or quartz engineered stone.
- Assorted colors available for counter top, laminate, vinyl bumper and powder coat.
- Canopy without tempered glass.
- Stainless or mirrored laminate accent strip between bumper rows.
- 6" stainless Steel legs, Legs with covers
- Removable toe kick


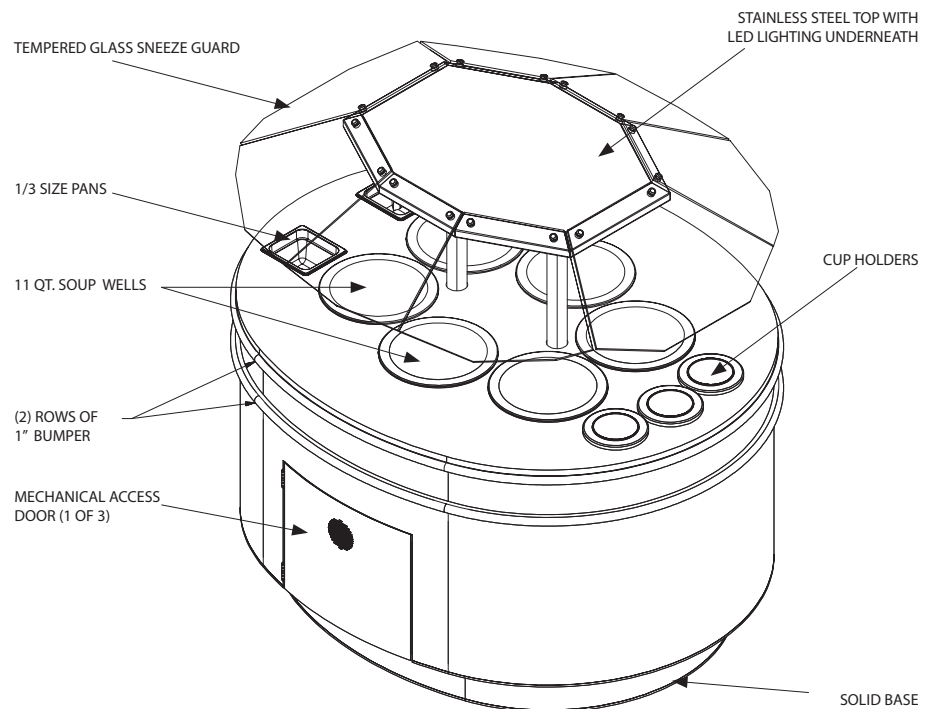


Engineered for stores with ambient conditions not to exceed 75°F and 55% relative humidity. Due to continuous improvements specifications may change without notice.

Built to meet the following specifications:



Drawings show a 50"x60" soup bar

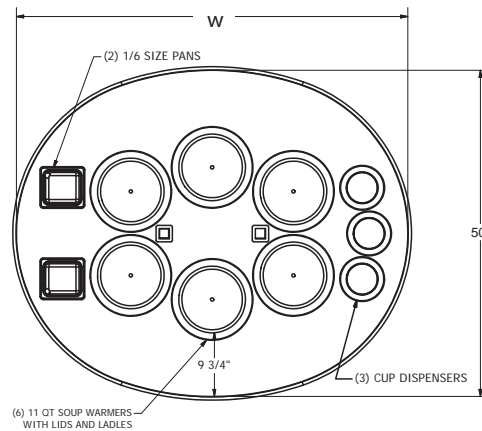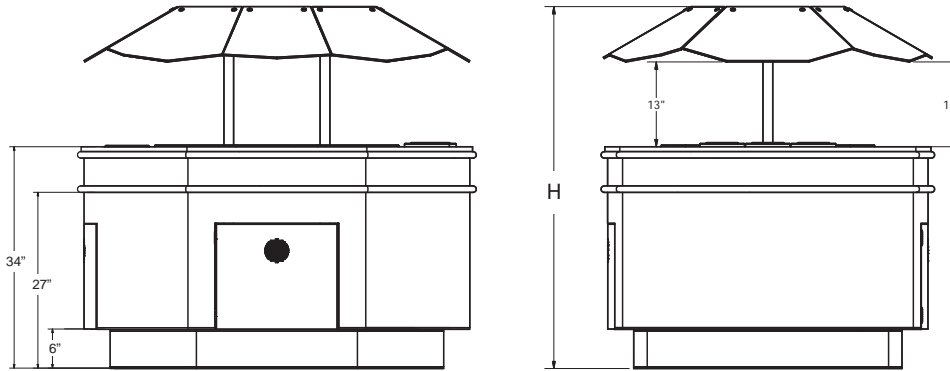

Oval Soup	Dimensions (inches)			Number of Wells	Cup Dispensers	Accessory Pans	Volts	Phase	Amps
	W	D	H						
50" x 110"	110	50	55	10 - 11qt.	6	2	120/208	1	34.1
50" x 60"	60	50	55	6 - 11qt.	3	2	120/208	1	

ELECTRICAL SPECIFICATIONS BASED ON 60" UNIT							
ELECTRICAL REQUIREMENTS - LOAD CENTER							
QTY	DESCRIPTION	MANUFACTURER	MODEL #	VOLTAGE	L-1 AMPS	L-2 AMPS	BREAKER RATING
3	SOUP WELL	HATCO	HWBH-11QTD	120	20.1		30A SINGLE
3	SOUP WELL	HATCO	HWBH-11QTD	120		20.1	30A SINGLE
2	34" LED LIGHTS	ELECTRALED	EFDS-3500	120		.26	
TOTAL AMPS PER LINE					20.1	20.36	
TOTAL ELECTRICAL REQUIRED IS 120V/208V, 60 Hz, 1 PH						20.36	AMP LOAD, 4 WIRES