

APPLICATIONS

- Combo Self Service Merchandiser
- Side 1: Refrigerated Grab-N-Go ideal for cold rotisserie chicken or sandwiches
- Side 2: Heated packaged food ideal for rotisserie chickens

STANDARD FEATURES

CABINET CONSTRUCTION

- 3/4" plywood frame construction
- Finished in high pressure plastic laminate
- Stainless steel interior
- High Pressure Laminate Counter top and exterior
- Stainless steel canopy and End panel
- 3" Thick insulated panel provides thermal break between hot and cold sections

REFRIGERATION SYSTEM

- Self-contained air-over display
- Condensate drains to floor drain
- Automatic self defrost
- Solar thermometer and refrigeration control on front of unit

HEATING SYSTEM

- Heated Stone Countertop has zoned heat with separate controls for each zone
- Overhead Heat with LED Lighting and separate controls

SHELVING

Refrigerated Side:

- Two shelves with ticket molding and overhead LED Lighting
- Stainless steel deck

Heated Side:



- 1 Stainless Steel shelf with overhead heat LED Lighting, 2 rows of 1-1/4" ticket molding

ELECTRICAL REQUIREMENTS

- Both heated and refrigerated sides wired to twist lock connections out of top

WARRANTY

- One year - Parts and Labor

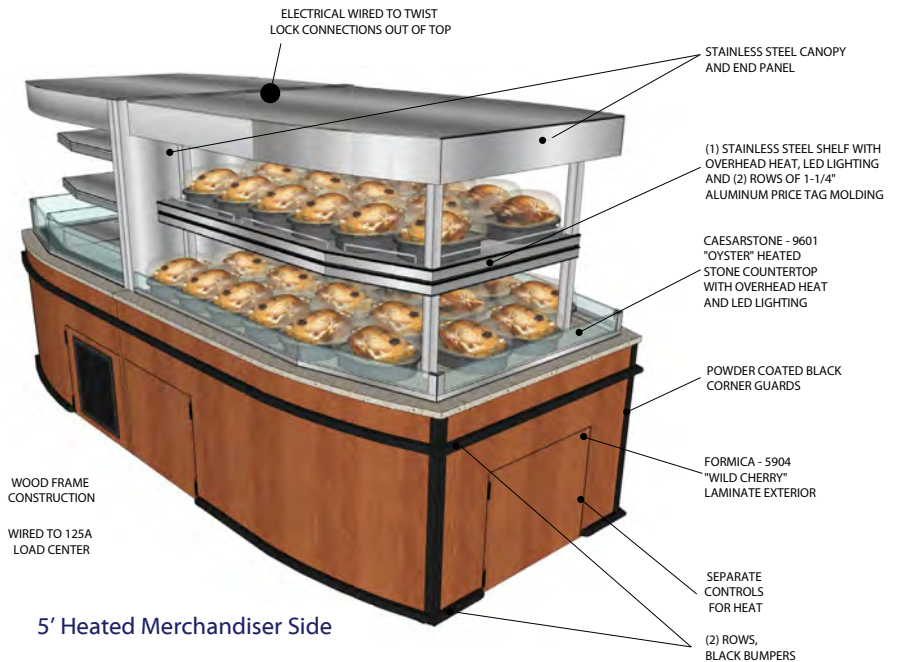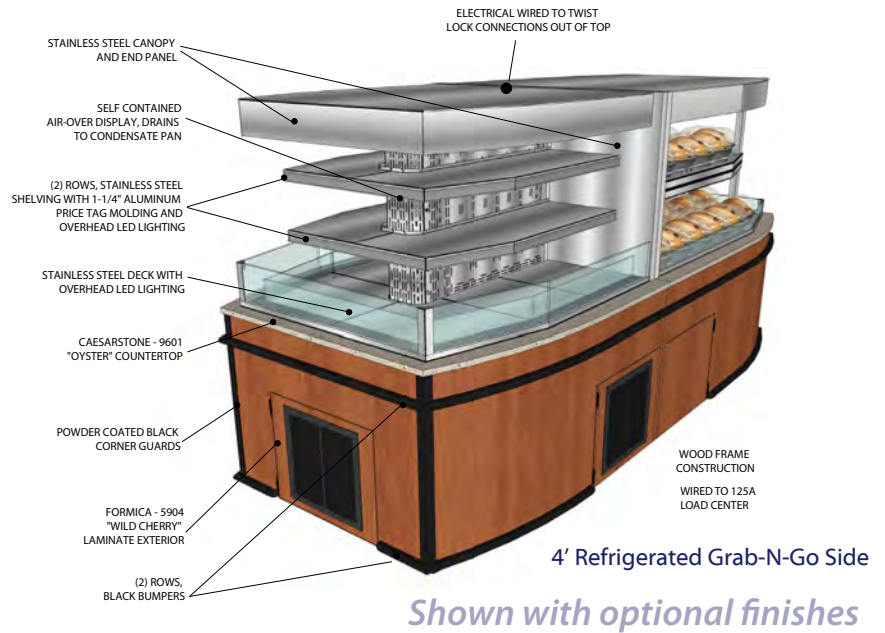


Engineered for stores with ambient conditions not to exceed 75°F and 55% relative humidity. Due to continuous improvements specifications may change without notice.

OPTIONS / ACCESSORIES

- Many other laminate finishes available
- Engineered Quartz, Solid Surface or stainless steel counter top
- Assorted colors for vinyl bumper
- Mirrored or stainless steel interior end panels
- Powder Coated Canopy, assembly, and corner guards
- Optional condensate removal devices available to eliminate need for plumbing.
- Remote refrigeration

Built to meet the following specifications:



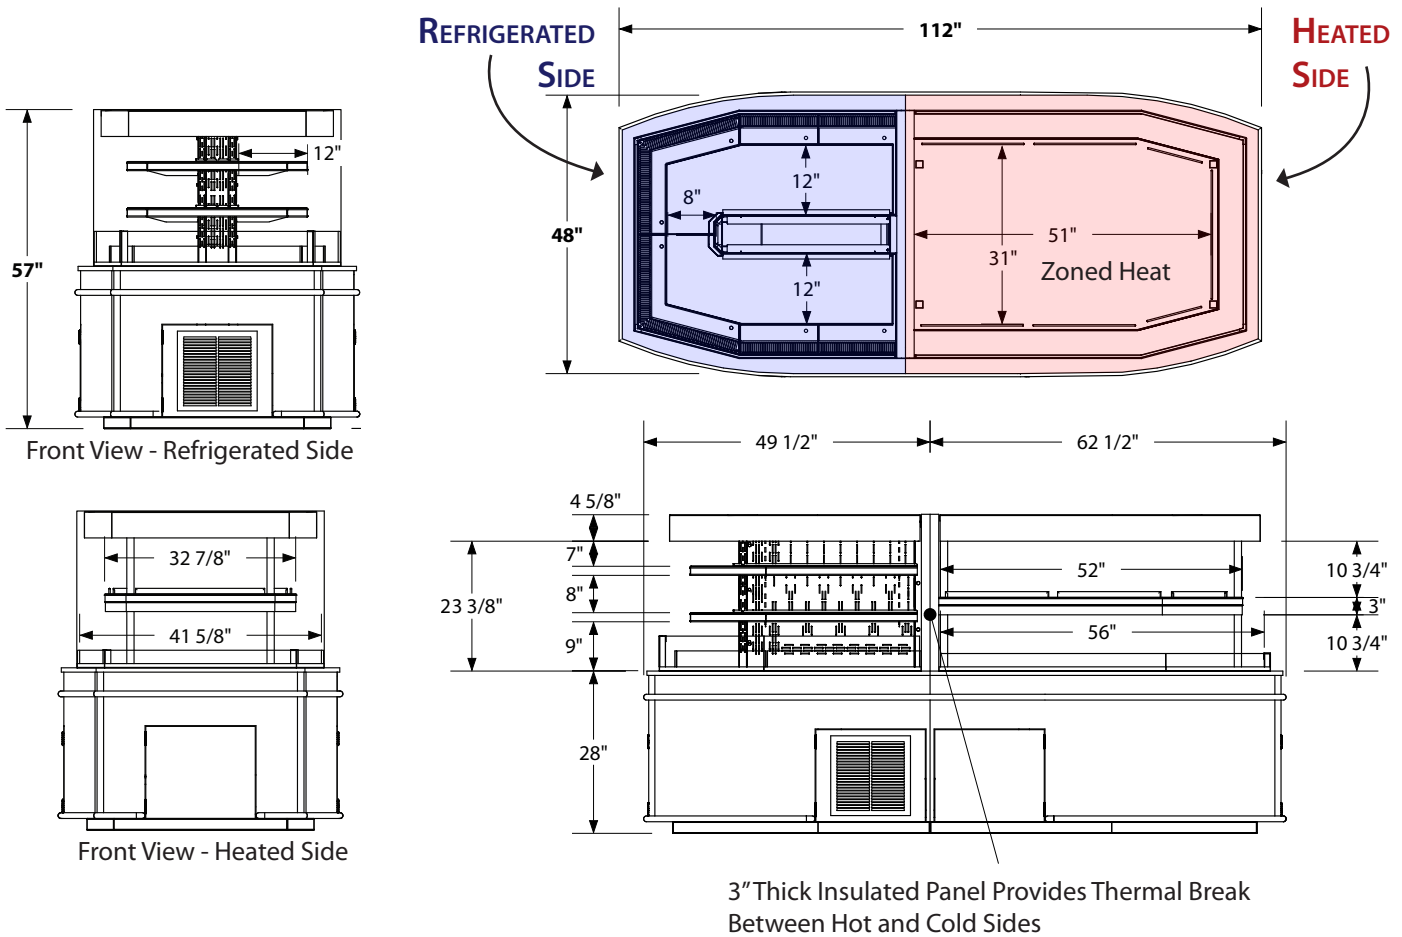

ELECTRICAL/REFRIGERATION SPECIFICATIONS

(WIRED TO 125A LOAD CENTER)

SP#	QTY	DESCRIPTION	MANUFACTURER	MODEL #	VOLTAGE	AMPS EA.	L-1 AMPS	L-2 AMPS	BREAKER RATING	
1	6	OVERHEAD HEAT	HATCO	GRA-48	208	3.8	22.8	22.8	30 AMP 2P	
3										
2										
2	1	CONDENSING UNIT	TECUMSEH	AJA-7480	208	10.3	10.3	10.3	15 AMP 2P	
4										
6	1	HOT PLATE	HATCO	GRSBF-30-1	120	6.7	16		20 AMP 1P	
	1	HOT PLATE	HATCO	GRSBF-36-0	120	9.3				
8	6	LIGHTS/FANS/CONTROLS	-	-	120	-		5	15 AMP 1P	
TOTAL AMPS PER LINE								49.1	38.1	
TOTAL ELECTRICAL REQUIRED IS 120/208 V, 60 Hz, 1 PH								49.1		AMP LOAD 4 WIRES