

APPLICATIONS

- Self-service merchandiser for “ready to eat” products, drinks.
- Impulse sales/Add ons
- Forced air refrigeration
- Medium temperature (34°-38°)

STANDARD FEATURES

CABINET CONSTRUCTION

- Base Cabinet and Counter Top consist of 3/4" plywood panels finished in high pressure plastic laminate
- Powder coated canopy and assembly
- Lighted Canopy with compact LED fixtures
- Solid Base
- Protective 1" vinyl bumper

SHELVING

- Three-tier style for displaying “ready to eat” products
- 1-1/4" Price tag molding on shelves
- Top can be used for light weight display

REFRIGERATION SYSTEM

- Remote refrigeration with a digital refrigeration control.
- Condensate removal through a floor drain

ELECTRICAL REQUIREMENTS


- Pre-wired to 120V/208A plug, 60Hz, 1 phase circuit. (see reverse for details)

WARRANTY

- One year - Parts and Labor

OPTIONS / ACCESSORIES

- Optional condensate removal devices available to eliminate need for plumbing.
- Assorted colors available for laminate, vinyl bumper and powder coat
- Powder coated canopy assembly
- Stainless or mirrored laminate accent strip between bumper and counter top
- Circuit Breaker Panel in lieu of junction box.


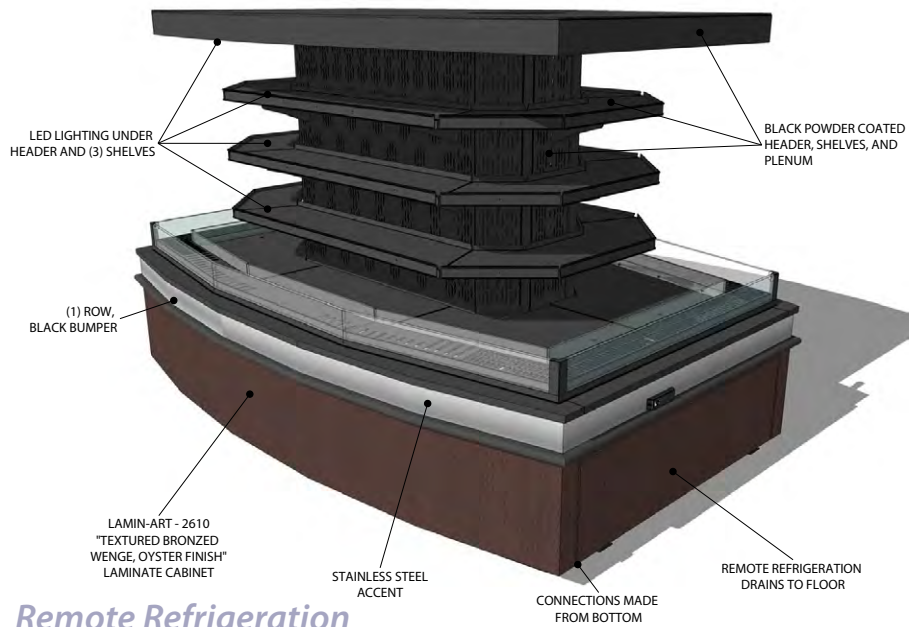


Remote Refrigeration

Engineered for stores with ambient conditions not to exceed 75°F and 55% relative humidity. Due to continuous improvements specifications may change without notice.

Built to meet the following specifications:



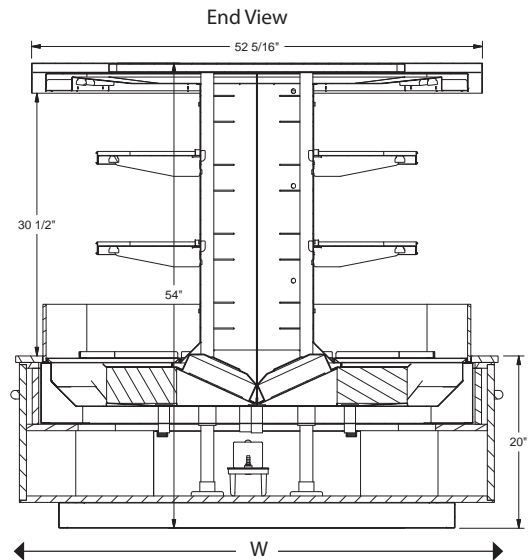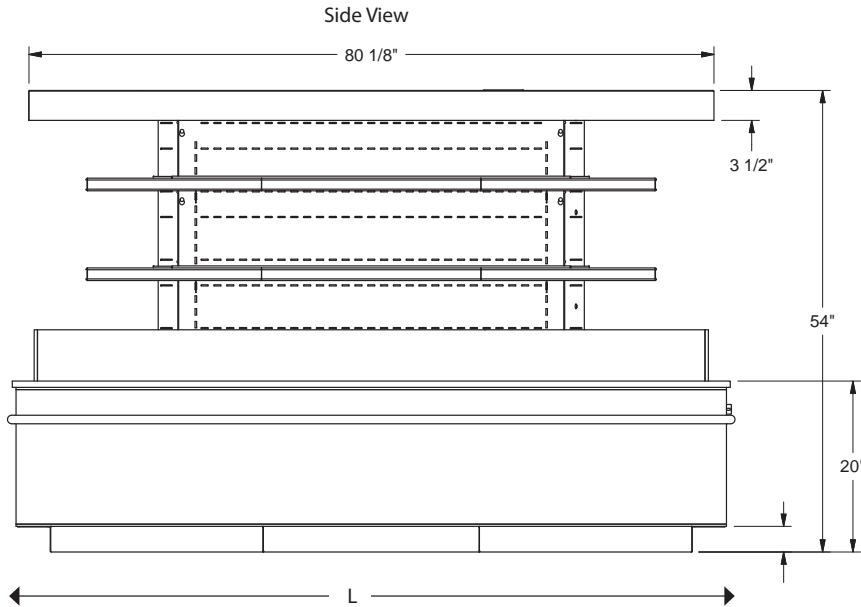

Refrigerated Low-Profile Island Merchandiser	Dimensions (inches)		
	W	L	H
56" x 84"	56"	84"	54"

ELECTRICAL/REFRIGERATION SPECIFICATIONS

ELECTRICAL REQUIREMENTS - ON 6' CORD NEMA 14-20F PLUG

QTY	DESCRIPTION	MANUFACTURER	MODEL #	VOLTAGE	AMPS EA	AMPS TOTAL
16	12" LED LIGHTS	ELECTRALED	EFDS-1-35-06	120	0.05	0.8
4	36" LED LIGHTS	ELECTRALED	EFDS-3-35-06	120	0.1	0.4
2	COIL FANS	EBM	W1G200	120	.2	0.4
TOTAL ELECTRICAL REQUIRED IS 120/208 V, 60 Hz, 1 PH						1.6

REFRIGERATION SPECS

QTY	DESCRIPTION	MANUFACTURER	MODEL #	BTU'S EA.	EVAP TEMP	REF. TYPE/OZ.
1	REMOTE. AIR OVER DISPLAY	R&D FIXTURES	N/A	8000	+20°	404-A